Shenzhen XQPOWER Technology Co., LTD


Product Inspection Specification


DOCUMENT NO	N/D.20211205.9.1
VER	X9_9150.01
Page.	P.1
Prepare Date	20221210

GSN	XQ-9S	Product Name	XQ-POWER 16.8V150kg-cm Brushless Servo	Model	XQ-S9150TTL	Material	CNC all-metal case

Process flow | **CNC / industry testing torque**

SIZE OF THE DRAWINGS

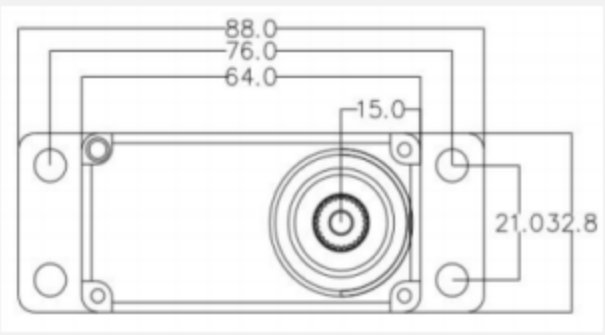

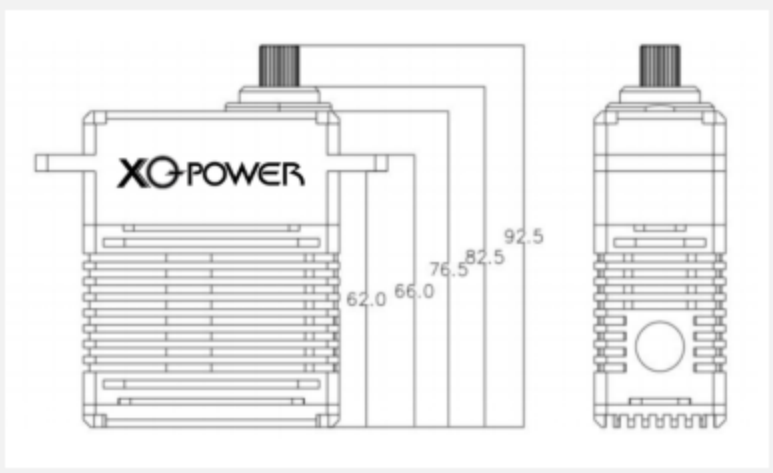

The Drawings

Photos1



Photos2



Control Specifications

NO.	Standard Test Environment	
1-1	Temperature range	25℃±5℃
1-2	Humidity range	65%±10%
NO.	**Apply Environmental Condition**	
2-1	Storage Temperature Range	-30℃ ~ 70℃
2-2	Operating Temperature Range	-20℃ ~ 60℃
NO.	**Mechanical Specification**	
3-1	Servo Dimensions	64*32.8*76.5 mm
3-2	Servo Weight	452g
3-3	Servo Gear	Steel Gear
3-4	Angle of limit	180°
3-5	Servo Bearing	2 Ball bearings
3-6	Output force shaft	25T-φ9.95mm
3-7	Servo arm	Metal
3-8	Case Material	Aluminium CNC
3-9	Servo line	Socket(Wire IM separately to buy)
3-10	Built-in motor	Brushless motor
3-11	Splash water resistance	Yes
Electrical Specification		
NO.	**Test Operating Voltage Range**	
4-1	**Work Voltage**	**8.4 V**
4-2	**No load speed**	0.29 sec/60°
4-3	Runnig current (no load)	150 mA
4-4	**Peak stall torque**	115 kg.cm
4-5	**Stall current**	6.5 A
	Work Voltage	**12.6 V**
4-6	**No load speed**	0.18 sec/60°
4-7	Runnig current (no load)	270 mA
4-8	**Peak stall torque**	160 kg.cm
4-9	**Stall current**	8 A
	Work Voltage	**16.8 V**
4-10	**No load speed**	0.14 sec/60°
4-11	Runnig current (no load)	400 mA
4-12	**Peak stall torque**	180 kg.cm
4-13	**Stall current**	10 A

Make table	CHECK	APPROVE
MR.ZHONG	MR.LIU	Manager.ZHOU

AQL

Shenzhen XQPOWER Technology Co., LTD

Product Inspection Specification


DOCUMENT NO	N/D.20211205.9.1
VER	X9_9150.01
Page.	P.2
Prepare Date	20221210

GSN	XQ-9S	Product Name	XQ-POWER 16.8V150kg-cm Brushless Servo	Model	XQ-S9150TTL	Material	CNC all-metal case

Control Specification

Test display diagram

Photos1

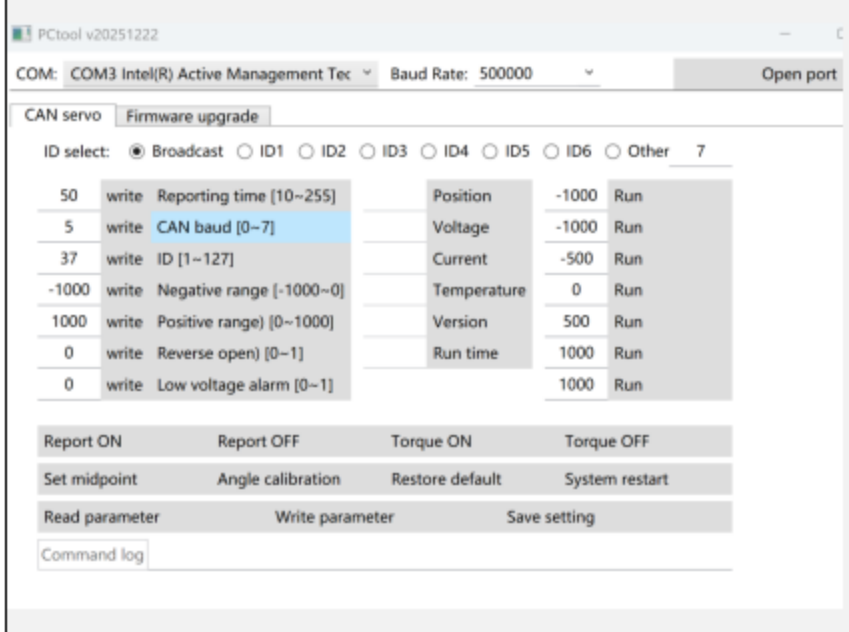

Accessories

Photos1



Reference opinions of all departments: Agree

EMPHASIS

NO.	Item	Specification
5-1	**Command signal**	TTL
5-2	**Amplifier type**	Digital Controller
5-3	**Pulse width range**	800~2200 μsec
5-4	**Neutral position**	1500 μsec
5-5	**Running degree**	360° (when1000~2000 μsec) Customization
5-6	**Dead band width**	4 μsec
5-7	**Rotating direction**	CCW (when 1000~2000μsec)

Appearance inspection	
NO.	QC details
5-7	**Material qualified**
5-8	**Gear structure qualified**
5-9	**Function qualified**
5-10	**Use data qualified**
5-11	**Pass the test**

NO.	Other
6-1	
6-2	
6-3	
6-4	

Other Accessories	
7-1	**Plastic arm bag**
7-2	**Screw**
7-3	**Metal arm (additional purchase)**



Make table	CHECK	APPROVE
MR.ZHONG	MR.LIU	Manager.ZHOU

AQL