Shenzhen XQPOWER Technology Co., LTD

XQ-POWER


Product Inspection Specification


DOCUMENT NO	N/D.20190809.5.3
VER	X8_8050.02
Page.	P.1
Prepare Date	20190810


GSN	XQ-8S	Product Name	XQ-POWER 8.4V52kg-cm Hight Voltage Digital Servo	Model	XQ-S8050D	Material	CNC all-metal case

Process flow | **CNC / industry testing torque**

SIZE OF THE DRAWINGS







The Drawings

Photos1



Photos2



Control Specifications		
NO.	Standard Test Environment	
1-1	Temperature range	25℃±5℃
1-2	Humidity range	65%±10%
NO.	Apply Environmental Condition	
2-1	Storage Temperature Range	-20℃～70℃
2-2	Operating Temperature Range	-15℃～65℃
NO.	Mechanical Specification	
3-1	Servo Dimensions	20*40*41 mm
3-2	Servo Weight	81g
3-3	Servo Gear	Stainless Steel
3-4	Angle of limit	210° or 360° continious
3-5	Servo Bearing	2 Ball bearings
3-6	Output force shaft	25T-φ5.94mm
3-7	Servo arm	Plastic, POM
3-8	Case Material	Aluminium CNC
3-9	Servo line	300mm
3-10	Built-in motor	Coreless motor
3-11	Splash water resistance	Yes
	Electrical Specification	
NO.	Test Operating Voltage Range	
4-1	Work Voltage	**6.0 V**
4-2	No load speed	0.158 sec/60°
4-3	Runnig current (no load)	350 mA
4-4	Peak stall torque	41 kg.cm
4-5	Stall current	4.4 A
	Work Voltage	**7.4 V**
4-6	No load speed	0.132 sec/60°
4-7	Runnig current (no load)	390 mA
4-8	Peak stall torque	47 kg.cm
4-9	Stall current	5.4 A
	Work Voltage	**8.4 V**
4-10	No load speed	0.108 sec/60°
4-11	Runnig current (no load)	450 mA
4-12	Peak stall torque	54 kg.cm
4-13	Stall current	6.2 A

AQL

Make table	CHECK	APPROVE
MR.ZHONG	MR.LIU	Manager.ZHOU

Shenzhen XQPOWER Technology Co., LTD

XQ-POWER

Product Inspection Specification


DOCUMENT NO	N/D.20190809.5.3
VER	X8_8050.02
Page.	P.2
Prepare Date	20190810

GSN	XQ-8S	Product Name	XQ-POWER 8.4V52kg-cm Hight Voltage Digital Servo	Model	XQ-S8050D	Material	CNC all-metal case

Control Specification

Test display diagram

Photos1

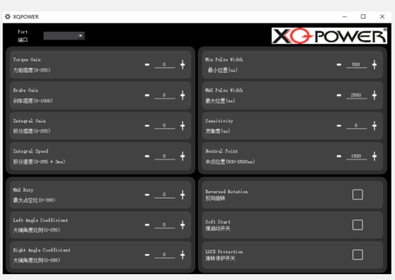

EMPHASIS

NO.	Item	Specification
5-1	Command signal	PWM 50-333Hz
5-2	Amplifier type	Digital Controller
5-3	Pulse width range	800～2200 μsec
5-4	Neutral position	1500 μsec
5-5	Running degree	360° (when1000～2000 μsec)
5-6	Dead band width	1 μsec
5-7	Rotating direction	CCW(when 1000～2000μsec)
	Appearance inspection	
NO.	QC details	
5-7	Material qualified	
5-8	Gear structure qualified	
5-9	Function qualified	
5-10	Use data qualified	
5-11	Pass the test	

AQL

Accessories

Photos1



NO.	Other
6-1	
6-2	
6-3	
6-4	
	Other Accessories
7-1	Plastic arm bag
7-2	Screw
7-3	Metal arm (additional purchase)



Reference opinions of all departments: Agree

Make table	CHECK	APPROVE
MR.ZHONG	MR.LIU	Manager.ZHOU