
Shenzhen XQPOWER Technology Co., LTD	DOCUMENT NO	N/D.2017.1.23
XQ-POWER Product Inspection Specification	VER	X83_8335.02
	Page.	P.1
	Prepare Date	20170125


GSN	XQ-8S	Product Name	XQ-POWER 8.4V35kg-cm Hight Voltage Waterproof Brushless Servo	Model	XQ-S8335TTL	Material	CNC all-metal case

Process flow

CNC / industry testing torque

SIZE OF THE DRAWINGS

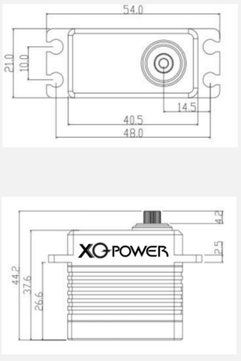



The Drawings

Photos1



Photos2

Control Specifications		
NO.	Standard Test Environment	
1-1	Temperature range	25℃±5℃
1-2	Humidity range	65%±10%
NO.	Apply Environmental Condition	
2-1	Storage Temperature Range	-20℃～70℃
2-2	Operating Temperature Range	-15℃～65℃
NO.	Mechanical Specification	
3-1	Servo Dimensions	21*40.5*37.6 mm
3-2	Servo Weight	87g
3-3	Servo Gear	Stainless Steel
3-4	Angle of limit	210°
3-5	Servo Bearing	2 Ball bearings
3-6	Output force shaft	25T-φ5.94mm
3-7	Servo arm	Plastic, POM
3-8	Case Material	Aluminium CNC
3-9	Servo line	300mm
3-10	Built-in motor	Brushless motor
3-11	Splash water resistance	IP67
	Electrical Specification	
NO.	Test Operating Voltage Range	
4-1	Work Voltage	**6.0 V**
4-2	No load speed	0.12 sec/60°
4-3	Runnig current (no load)	300 mA
4-4	Peak stall torque	24 kg.cm
4-5	Stall current	2.8 A
	Work Voltage	**7.4 V**
4-6	No load speed	0.09 sec/60°
4-7	Runnig current (no load)	350 mA
4-8	Peak stall torque	30 kg.cm
4-9	Stall current	3.5 A
	Work Voltage	**8.4 V**
4-10	No load speed	0.07 sec/60°
4-11	Runnig current (no load)	410 mA
4-12	Peak stall torque	35 kg.cm
4-13	Stall current	4.0 A

AQL

Make table	CHECK	APPROVE
MR.ZHONG	MR.LIU	Manager.ZHOU

Shenzhen XQPOWER Technology Co., LTD	DOCUMENT NO	N/D.2017.1.23
XQ-POWER Product Inspection Specification	VER	X83_8335.02
	Page.	P.2
	Prepare Date	20170125

GSN	XQ-8S	Product Name	XQ-POWER 8.4V35kg-cm Hight Voltage Waterproof Brushless Servo	Model	XQ-S8335TTL	Material	CNC all-metal case

Control Specification

Test display diagram

Photos1



EMPHASIS

NO.	Item	Specification
5-1	Command signal	TTL
5-2	Amplifier type	Digital Controller
5-3	Pulse width range	800～2200 μsec
5-4	Neutral position	1500 μsec
5-5	Running degree	360° (when1000～2000 μsec) Customization
5-6	Dead band width	2 μsec
5-7	Rotating direction	CCW(when 1000～2000 μsec)

Appearance inspection	
NO.	QC details
5-7	Material qualified
5-8	Gear structure qualified
5-9	Function qualified
5-10	Use data qualified
5-11	Pass the test

AQL

Accessories

Photos1



Other	
NO.	
6-1	
6-2	
6-3	
6-4	

Other Accessories	
7-1	Plastic arm bag
7-2	Screw
7-3	Metal arm (additional purchase)



Reference opinions of all departments: Agree

Make table	CHECK	APPROVE
MR.ZHONG	MR.LIU	Manager.ZHOU